GaN POWER SUPPLY MANUFACTURE & DESIGN

PROFESSIONAL OEM/ODM/JDM

Shenzhen Huikeyuan Co.,Ltd

深圳匯科源電子科技有限公司

Cathedy GmbH(德國)

GaN
PD240W

L152*
W69*
H31MM





USB TYPE-C PD Power Adapter



USB TYPE-C PD Power Adapter



Vehicle Charger

GaN
PD240W





USB TYPE-C PD DC Adapter



12V-24V DC Adapter



USB -C PD Charging Hub

240W GaN USB-C Power Adapter



36W-90W AC DC Adapter



GaN Medical Power Supply



GaN 100W-480W PSU

- **GB/T 24001-2016 idt ISO 14001:2015** (Environmental Management System)
- **GB/T 45001-2020 idt ISO 45001:2018** (Occupational Health and Safety Management System)
- **GB/T 39604-2020** (Social Responsibility Management System)
- **ISO 9001:2015** (Quality Management System)
- **ISO 13485:2016** (Quality Management System for Medical Devices)
- **IECQ QC 080000:2017** (Hazardous Substance Process Control)
- **EcoVadis Certification**

+ Customizable Certification

Company Overview







Shenzhen Huikeyuan Co., Ltd., established in 2013, is a National High-Tech Enterprise specializing in the R&D, production, and sales of intelligent power adapters.

The company operates production bases in Shenzhen and Huizhou, and maintains a subsidiary in Hamburg, Germany. Founded in 2016, the German subsidiary includes a warehouse primarily dedicated to providing fast delivery services for European customers. The Huizhou factory, established in 2022, currently focuses on plastic injection molding, cable assembly, and the production of a portion of power supplies.

Our products serve a wide range of industries, covering applications such as:

Medical Equipment, Communication POE Systems, AI Servers, Video Conferencing Equipment, Financial POS Equipment, Fitness Equipment, AI Laptops, Industrial Computers, Drones,Handheld Gaming Devices, Smart Home Systems, etc.

We deliver customized solutions tailored to your specific requirements. Our products meet numerous international safety standards, including UL/ETL/FCC/CB/TÜV GS/CE/UKCA/KCC/PSE/SAA/RCM/CCC.

Furthermore, we are certified to the following management system standards:

- GB/T 24001-2016 idt ISO 14001:2015 (Environmental Management System)
- GB/T 45001-2020 idt ISO 45001:2018 (Occupational Health and Safety Management System)
- GB/T 39604-2020 (Social Responsibility Management System)
- ISO 9001:2015 (Quality Management System)
- ISO 13485:2016 (Quality Management System for Medical Devices)
- IECQ QC 080000:2017 (Hazardous Substance Process Control)
- EcoVadis Certification

We provide an industry-leading 5-year warranty on our products, offering the most flexibleMOQ (Minimum Order Quantity) options and multiple payment methods.

Win-win cooperation is the cornerstone of our client partnerships. HKY is committed to delivering the optimal power solutions for your needs.

深圳市汇科源电子科技有限公司成立于2013年，是一家专业从事智能电源适配器研发、生产、销售的国家级高新技术企业。

公司在深圳和惠州设有生产基地，并在德国汉堡设有分公司。德国分公司于2016年成立并设有仓库，主要是为欧洲客户提供快速发货的服务。

惠州工厂于2022年成立，目前主要是负责注塑，线材和一部分电源的生产。我们的产品涵盖医疗设备、通信POE系统、AI服务器、视频会议设备金融POS设备、健身设备、AI笔记本电脑、工业电脑、无人机、手持游戏机、智能家居等各个行业的应用。我们根据您的需求提供非常规的解决方案。

我们的产品有UL/ETL/FCC/CB/TUVGS/CE/UKCA/KCC/KCC/PSESAA/RCM/CCC等安全标准，并且工厂已通过 GB/T 24001-2016 idt, ISO 14001:2015环境管理体系，GB/T 45001-2020 idt，ISO 45001:2018职业健康安全管理体系，GB/T 39604-2020社会责任管理体系，ISO 9001:2015质量管理体系，ISO 13485:2016医疗器械质量管理体系，IECQ QC 080000:2017有害物质管控和欧洲EcoVadis认证，产品提供了长达五年质保的服务，提供最灵活的MOQ方式以及多种付款模式。

合作共赢是公司与客户合作的目标，HKY为您提供最佳的电源解决方案。

Flexible 21–24V DC Input

Powered directly from a 21–24V DC power source
Compatible with:

- Industrial DC Power Supplies
- Medical Power Systems
- Charging Cart Power Supplies
- 24V RV Power Systems
- Marine / Boat Electrical Systems
- Outdoor Portable Power Stations
- Solar Battery Systems

No additional AC adapter is required

Designed for Mobile Power Applications

Unlike traditional USB chargers, HKY Power Distributor can be connected directly to existing 24V DC systems, making it an ideal solution for:

- RV & Camper Vans
- Boats & Yachts
- Outdoor Mobile Workstations
- Emergency Response Vehicles
- Field Service Equipment
- Portable Medical Systems

Power your USB-C devices wherever DC power is available

Built for Professional Applications


Designed for demanding environments including:

- Medical Carts
- Charging Cabinets
- AI Edge Computing
- Digital Signage
- Test & Measurement Instruments
- Self-service Kiosks
- Healthcare Equipment
- Education Classrooms
- Industrial Automation
- Network Equipment

8-Port Model

8 × Independent 45W USB-C PD Outputs

Perfect for tablets, Chromebooks, handheld terminals and mobile devices

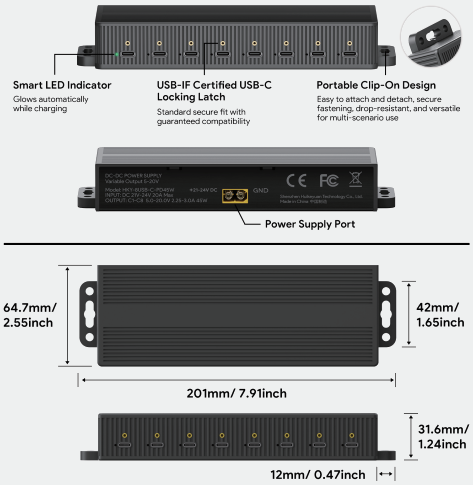



12-Port Model

12 × Independent 65W USB-C PD Outputs

Ideal for laptops, AI terminals, industrial PCs and high-power USB-C devices

Every port negotiates power independently, ensuring maximum stability and reliability

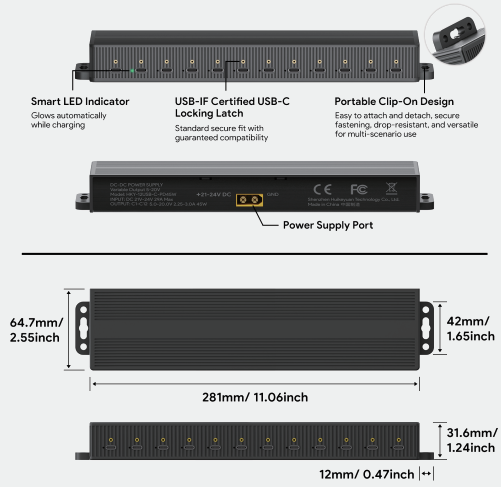

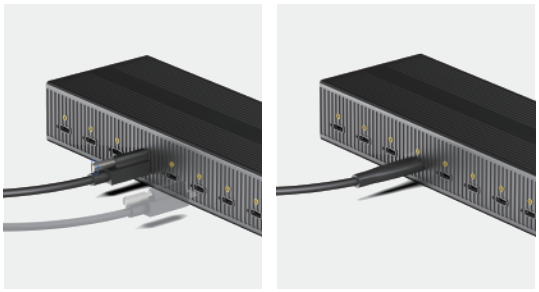

Industrial-Grade Aluminum Housing

Excellent heat dissipation
Rugged aluminum enclosure
Compact and lightweight
Designed for continuous 24/7 operation

Easy Installation

Integrated mounting brackets support:

Wall Mount
Cabinet Installation
Charging Cart Integration
Equipment Enclosures
Vehicle Installation
Modular Power Distribution

Individual LED Indicator for Every USB-C Port

IEach USB-C port is equipped with an independent LED status indicator, allowing users to monitor the operating status of every connected device at a glance.

Benefits:

Real-time power status monitoring
Quickly identify active or inactive ports
Easy troubleshooting and maintenance
Improve operational efficiency
Ideal for charging carts, medical systems, industrial equipment and unattended installations

Know the status of every port instantly.

Customers can freely choose their preferred DC power supply.

Supports integration with:

- More flexibility.
- Lower certification cost.
- Simpler system integration.

OEM / ODM Available

Customize your solution with:

Logo Printing / Housing Color / Output Configuration / Cable Length Firmware / Packaging

5-Year Warranty

Designed for long-term reliability with enterprise-level quality and support.

GaN-Medical AC-DC PSU

Model #	Picture	Specifications	Power	Certifications
D45C-60601-PD45W		Type: GaN-Desktop-C14 Dimension: L107mm*W45.5mm*H30.2mm Input: 100V-240V 50/60Hz Output: 5-20V PD45W **Cypress PD 3.0**	**45W**	IEC/EN 60601 ROHS
D65A-60601-PD65W		Type: GaN-Desktop-C14 Dimension: L115mm*W51mm* H30mm Input: 100V-240V 50/60Hz Output: 5-20V PD65W **Cypress PD 3.0**	**65W**	IEC/EN 60601 ROHS
A100C14-60601-PD100W		Type: GaN-Desktop-C14 Dimension: L145.9mm*W59.2mm*H28.5mm Input: 100V-240V 50/60Hz Output: 5-20V PD100W **Cypress PD 3.0**	**100W**	IEC/EN 60601 ROHS
A100C14-60601-PD140W		Type: GaN-Desktop-C14 Dimension: L145.9mm*W59.2mm*H28.5mm Input: 100V-240V 50/60Hz Output: 5-28V PD140W **Cypress PD 3.1**	**140W**	IEC/EN 60601 ROHS
A100C14-60601-PD240W		Type: GaN-Desktop-C14 Dimension: L152mm*W69mm*H31mm Input: 100V-240V 50/60Hz Output: 5-48V PD240W **Cypress PD 3.1**	**240W**	IEC/EN 60601 ROHS

Medical- DC ADAPTER

Model #	Picture	Specifications	Power	Certifications
C65-XXXXX YYYY		Input DC: 12V-24V DC 8A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 19V3.42A-24V2.71A (Customizable parameters)	65W	IEC/EN 60601 ROHS
C65-65W USB-C		Input DC: 12V-24V DC 8A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 5V-20V PD65W **Cypress PD 3.0**	65W	IEC/EN 60601 ROHS
C100-XXXXX YYYY		Input DC: 12V-24V DC 12A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 19V4.74A-20V3.75A (Customizable parameters)	100W	IEC/EN 60601 ROHS
C100-100W USB-C		Input DC: 12V-24V DC 12A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 5V-20V PD100W **Cypress PD 3.0**	100W	IEC/EN 60601 ROHS
C120-XXXXX YYYY		Input DC: 12V-24V DC 12A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 19V6.32A-24V5A (Customizable parameters)	120W	IEC/EN 60601 ROHS
C140-140W USB-C		Input DC: 12V-24V DC 12A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 5V-28V PD140W **Cypress PD 3.1**	140W	IEC/EN 60601 ROHS
C150-XXXXX YYYY		Input DC: 12V-24V DC 15A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 19V7.89A-24V6.25A (Customizable parameters)	150W	IEC/EN 60601 ROHS

NEW GaN USB-C PD POWER ADAPTER

Q16-GaN-PD45W

5-20V PD3.0 45W

Input: **100-240VAC, 50Hz/60Hz, 1.1A Max** Output: **5--20V 45W 3A MAX**

Scope/	Protection/	Efficiency/
Applied to the field of IT and AV equipment	OCP,SCP,OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)

Size/	
L50*W50*H28mm	**The specification shall be applied to the field of IT and AV Medical equipment field**



Q36-GaN-PD65W

5-20V PD3.0 65W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5--20V 65W 3.25A MAX**

Scope/	Protection/	Efficiency/
Applied to the field of IT and AV equipment	OCP,SCP,OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)

Size/	
L77*W40.5*H30mm	**The specification shall be applied to the field of IT and AV Medical equipment field**



D40-GaN-PD45W

5-20V PD3.0 45W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5--20V 45W 3A MAX**

Scope/	Protection/	Efficiency/
Applied to the field of IT and AV equipment	OCP,SCP,OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)

Size/	
L92.5*W36.3*H26mm	**The specification shall be applied to the field of IT and AV Medical equipment field**

C8



D40-GaN-PD45W

5-20V PD3.0 45W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5--20V 45W 3A MAX**

Scope/	Protection/	Efficiency/
Applied to the field of IT and AV equipment	OCP,SCP,OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)

Size/	
L92.5*W36.3*H26mm	**The specification shall be applied to the field of IT and AV Medical equipment field**

C6



D40-GaN-PD65W

5-20V PD3.0 65W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5--20V 65W 3.25A MAX**

Scope/	Protection/	Efficiency/
Applied to the field of IT and AV equipment	OCP,SCP,OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)

Size/	
L92.5*W36.3*H26mm	**The specification shall be applied to the field of IT and AV Medical equipment field**

C8



NEW GaN USB-C PD POWER ADAPTER

D40-GaN-PD65W (5-20V PD3.0 65W)

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5--20V 65W 3.25A MAX

Scope/	Protection/	Efficiency/	Size/
Applied to the field of IT and AV equipment	OCP,SCP, OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)	L92.5*W36.3* H26mm

The specification shall be applied to the field of IT and AV Medical equipment field



A100-GaN-PD130W (5-20V PD3.1 130W)

Input: 100-240VAC, 50Hz/60Hz, 2A Max Output: 5-20V 130W 6.5A MAX

Scope/	Protection/	Efficiency/	Size/
Applied to the field of IT and AV equipment	OCP,SCP, OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)	L145.9*W59.2* H28.5mm

The specification shall be applied to the field of IT and AV Medical equipment field



A100-GaN-PD140W (5-28V PD3.1 140W)

Input: 100-240VAC, 50Hz/60Hz, 2A Max Output: 5-28V 140W 5A MAX

Scope/	Protection/	Efficiency/	Size/
Applied to the field of IT and AV equipment	OCP,SCP, OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)	L145.9*W59.2* H28.5mm

The specification shall be applied to the field of IT and AV Medical equipment field



A180C-GaN-PD240W (5-48V PD3.1 240W)

Input: 100-240VAC, 50Hz/60Hz, 3A Max Output: 5-48V 240W 5A MAX

Scope/	Protection/	Efficiency/	Size/
Applied to the field of IT and AV equipment	OCP,SCP, OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)	L152*W69* H31mm

The specification shall be applied to the field of IT and AV Medical equipment field



A180-GaN-PD240W (5-48V PD3.1 240W)

Input: 100-240VAC, 50Hz/60Hz, 3A Max Output: 5-48V 240W 5A MAX

Scope/	Protection/	Efficiency/	Size/
Applied to the field of IT and AV equipment	OCP,SCP, OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)	L152*W69* H31mm

The specification shall be applied to the field of IT and AV Medical equipment field



GaN RT-5 PD100W 5-20V PD100W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 100W (5V/9V/12V/15V/20V)

Scope/	Protection/	Efficiency/	Size/
Applied to the field of IT and AV equipment	OCP,SCP, OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)	L76.6*W54* H30.1mm

The specification shall be applied to the field of IT and AV Medical equipment field



GaN RT15-5 PD140W 5-28V PD140W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-28V 140W 5A MAX

Scope/	Protection/	Efficiency/	Size/
Applied to the field of IT and AV equipment	OCP,SCP, OVP	Meet CEC, Energy Star 3.0 (CoC V5-Level VI)	L93*W57.7* H30.1mm

The specification shall be applied to the field of IT and AV Medical equipment field



Q45D5-TYPE-C 5-20V PD3.0 45W

Input: **100-240VAC, 50Hz/60Hz, 1.1A Max** Output: **5-20V 45W (5V/9V/12V/15V/20V)**

Scope/	Protection/	Size/	No Load Power
Applied to the field of IT and AV equipment	OCP,SCP,OVP	L61.3*W61.3*H30.1mm	Consumption<0.075W (Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0 (CoC V5-Level VI)



Q45D6-TYPE-C 5-20V PD3.0 45W

Input: **100-240VAC, 50Hz/60Hz, 1.1A Max** Output: **5-20V 45W (5V/9V/12V/15V/20V)**

Scope/	Protection/	Size/	No Load Power
Applied to the field of IT and AV equipment	OCP,SCP,OVP	L61.3*W61.3*H30.1mm	Consumption<0.075W (Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0 (CoC V5-Level VI)



A12 -TYPE-C 5-20V PD65W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5-20V 65W (5V/9V/12V/15V/20V)**

Scope/	Protection/	Size/	No Load Power
Applied to the field of IT and AV equipment	OCP,SCP,OVP	L112.1*W52*H27.9mm	Consumption<0.15W (Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0 (CoC V5-Level VI)



Q65M5-TYPE-C 5-20V PD65W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5-20V 65W (5V/9V/12V/15V/20V)**

Scope/	Protection/	Size/	No Load Power
Applied to the field of IT and AV equipment	OCP,SCP,OVP	L69.4*W69.4*H30.1mm	Consumption<0.15W (Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0 (CoC V5-Level VI)



Q65M6-TYPE-C 5-20V PD65W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5-20V 65W (5V/9V/12V/15V/20V)**

Scope/	Protection/	Size/	No Load Power
Applied to the field of IT and AV equipment	OCP,SCP,OVP	L69.4*W69.4*H30.1mm	Consumption<0.15W (Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0 (CoC V5-Level VI)



A100-1-TYPE-C 5-20V PD3.0 100W

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max** Output: **5-20V 100W (5V/9V/12V/15V/20V)**

Scope/	Protection/	Size/	No Load Power
Applied to the field of IT and AV equipment	OCP,SCP,OVP	L145.89*W59.19*H28.5mm	Consumption<0.15W (Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0 (CoC V5-Level VI)



C65-65W USB-C

65W USB-C Vehicle Charger

Input: **12V-24V DC 12A Max（9-32V）** Output: **5V-20V 65W Max**
Power: **65W Max in Total**



Compatible with Macbook and other laptop/tablets/smartphone

C100-100W USB-C

100W USB-C Vehicle Charger

Input: **12V-24V DC 12A Max（9-32V）** Output: **5V3A/9V3A/12V3A/15V3A/20V5A**
Power: **100W Max in Total**



Compatible with Macbook and other laptop/tablets/smartphone

C118-118W USB-C

118W USB-C PD3.0 Vehicle Adapter

Input DC: **12V-24V DC 12A Max（9-32V）** Output DC: **5V3A/9V3A/12V3A/15V3A/20V5A**
Output QC 3.0 DC: **5V3A/9V2A/12V1.5A**



Compatible with Macbook Pro/Macbook Air and other laptop/tablets/smartphone

C140-140W USB-C

140W USB-C PD3.1 DC Vehicle Charger

Input: **12V-24V DC 12A Max（9-32V）**
Output: **5V3A/9V3A/12V3A/15V3A/20V5A/28V5A**



Compatible with Macbook Pro/Macbook Air and other laptop/tablets/smartphone

C100C-100W USB-C

2 IN 1 Universal 100W USB-C PD3.0 Vehicle Charger

Input: **12V-24V DC 12A Max（9-32V）** Output: **5V3A/9V3A/12V3A/15V3A/20V5A**
Power: **100W Max in Total**



Compatible with Macbook and other laptop/tablets/smartphone

C140C-100W USB-C

2 IN 1 Universal 140W USB-C PD3.1 Vehicle Charger

Input: **12V-24V DC 12A Max（9-32V）** Output: **5V3A/9V3A/12V3A/15V3A/20V5A/28V5A**



Compatible with Macbook and other laptop/tablets/smartphone

C145C-145W USB-C

2 IN 1 Universal 145W USB-C Vehicle Charger
140W USB-C PD3.1 DC Vehicle Charger

Input: **12V-24V DC 15A Max（9--32V）** Output C: **5V3A,9V3A,12V3A,15V3A,20V5A, 28V5A**
Output C: **5V3A,9V3A,12V3A,15V3A,20V5A, 28V5A** Output C+C: **100W+45W**



Compatible with Macbook and other laptop/tablets/smartphone

C150-1-TYPE-C 156.0W Max

Input: **12V-24V DC 14A Max**
C1 Output PD3.1/3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A/28V5A (140W)**
C2 Output PD: **5V3A/9V2.22A/12V1.67A (20W)** A1 A2 Output DC: **5V3A/9V2A/12V1.5A (18W)**



Compatible with Macbook and other laptop/tablets/smartphone

C160-TYPE-C 160.0W Max

Input: **12V-24V DC 18A Max**
C1 Output PD3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A(100W)**
C2/C3/C4 Output PD: **5V3A/9V2.22A/12V1.67A(20W)**
1. C1+C2+C3+C4: **PD3.0 100W+20W+20W+20W**




Compatible with Macbook and other laptop/tablets/smartphone

Global Travel Switching
Power Supply

Customized

Providing Power Supply from
5V to 72V Max. 480W



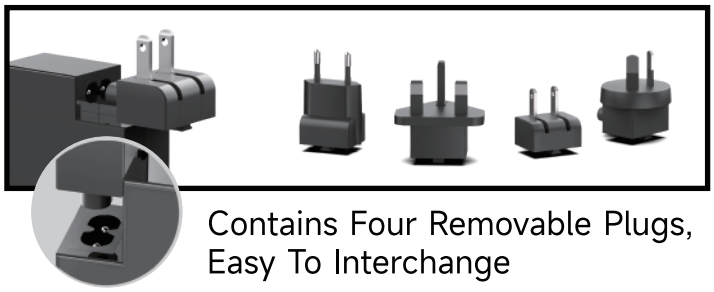

Contains Four Removable Plugs,
Easy To Interchange

Type	Model	Power	Output	AC	Certificates
Global travel Switching Power Supply	Q45D9	40W	12V3.33A	C8	
Global travel Switching Power Supply	Q45D9	45W	15V3A	C8	
Global travel Switching Power Supply	Q45D9	45W	19V2.37A	C8	
Global travel Switching Power Supply	Q45D9	45W	20V2.25A	C8	
Global travel Switching Power Supply	Q45D9	48W	24V2A	C8	
Global travel Switching Power Supply	Q65C1-2	60W	12V5A	C8	
Global travel Switching Power Supply	Q65C1-2	60W	15V4A	C8	
Global travel Switching Power Supply	Q65C1-2	65W	19V3.42A	C8	
Global travel Switching Power Supply	Q65C1-2	65W	19.5V3.33A	C8	
Global travel Switching Power Supply	Q65C1-2	65W	20V3.25A	C8	
Global travel Switching Power Supply	Q65C1-2	65W	24V2.37A	C8	
Global travel Switching Power Supply	RT100-GaN	72W	12V6A	C8	
Global travel Switching Power Supply	RT100-GaN	90W	15V6A	C8	
Global travel Switching Power Supply	RT100-GaN	90W	19V4.74A	C8	
Global travel Switching Power Supply	RT100-GaN	100W	19V5.2A	C8	
Global travel Switching Power Supply	RT100-GaN	90W	19.5V4.62A	C8	
Global travel Switching Power Supply	RT100-GaN	100W	20V5A	C8	
Global travel Switching Power Supply	RT100-GaN	90W	24V3.75A	C8	
Global travel Switching Power Supply	RT100-GaN	100W	24V4.16A	C8	
Global travel Switching Power Supply	RT15-GAN	84W	12V7A	C8	
Global travel Switching Power Supply	RT15-GAN	120W	19V6.32A	C8	
Global travel Switching Power Supply	RT15-GAN	120W	24V5A	C8	
Global travel Switching Power Supply	RT15-GAN	144W	48V3A	C8	


Desktop Switching
Power Supply

Customized

Providing Power Supply from 5V to 72V Max. 480W

C6 

C8 

C14 

Type	Model	Power	Output	AC	Certificates
Desktop Type	A45A-2	28W	8V3.5A	C8	
Desktop Type	A45A-2	36W	9V4A	C8	
Desktop Type	A45A-2	48W	12V4A	C8	
Desktop Type	A45A-2	50W	12V4.16A	C8	
Desktop Type	A45A-2	42W	14V3A	C8	
Desktop Type	A45A-2	45W	15V3A	C8	
Desktop Type	A45A-2	45W	18V2.5A	C8	
Desktop Type	A45A-2	42W	19V2.1A	C8	
Desktop Type	A45A-2	45W	19V2.37A	C8	
Desktop Type	A45A-2	48W	19V2.53A	C8	
Desktop Type	A45A-2	45W	20V2.25A	C8	
Desktop Type	A45A-2	48W	24V2A	C8	
Desktop Type	A45A-2	48W	48V1A	C8	
Desktop Type	A45A-2	48W	54V0.88A	C8	
Desktop Type	A12-2	45W	9V5A	C8	
Desktop Type	A12-2	60W	12V5A	C8	
Desktop Type	A12-2	65W	14V4.5A	C8	
Desktop Type	A12-2	60W	15V4A	C8	
Desktop Type	A12-2	65W	15V4.3A	C8	
Desktop Type	A12-2	65W	16V4.06A	C8	
Desktop Type	A12-2	60W	18V3.5A	C8	
Desktop Type	A12-2	65W	19V3.42A	C8	
Desktop Type	A12-2	65W	19.5V3.33A	C8	
Desktop Type	A12-2	65W	20V3.25A	C8	
Desktop Type	A12-2	65W	24V2.71A	C8	
Desktop Type	A12-2	65W	48V1.35A	C8	
Desktop Type	A12-2	65W	52V1.2A	C8	

Type	Model	Power	Output	AC	Certificates
Desktop Type	A90	84W	12V7A	C14	
Desktop Type	A159A2	84W	14V6A	C8	
Desktop Type	A159A2	90W	15V6A	C8	
Desktop Type	A159A2	90W	16V5.5A	C8	
Desktop Type	A159A	90W	19V4.74A	C6	
Desktop Type	A159A	90W	19.5V4.62A	C6	
Desktop Type	A159A	90W	24V3.75A	C6	
Desktop Type	A159A2	90W	24V3.75A	C8	
Desktop Type	A159A	90W	48V1.88A	C6	
Desktop Type	A159A	90W	54V1.66A	C6	
Desktop Type	A100	90W	18V5A	C6	
Desktop Type	A100	95W	19V5A	C6	
Desktop Type	A100	100W	20V5A	C6	
Desktop Type	A100	100W	24V4.16A	C6	
Desktop Type	A100 C14	120W	12V10A	C14	
Desktop Type	A100 C14	120W	15V8A	C14	
Desktop Type	A100 C14	120W	19V6.32A	C14	
Desktop Type	A100 C14	120W	24V5A	C14	
Desktop Type	A100 C14	135W	19V7.1A	C14	
Desktop Type	A100 C14	144W	12V12A	C14	
Desktop Type	A100 C14	144W	24V6A	C14	
Desktop Type	A190	150W	12V12.5A	C14	
Desktop Type	A190	150W	15V10A	C14	
Desktop Type	A190	180W	18V10A	C14	
Desktop Type	A190	180W	19.5V9.23A	C14	
Desktop Type	A190	180W	19V9.5A	C14	
Desktop Type	A190	180W	20V9A	C14	
Desktop Type	A190	180W	24V7.5A	C14	

Type	Model	Power	Output	AC	Certificates
Desktop Type	A180	180W	12V15A	C14	
Desktop Type	A180	180W	15V12A	C14	
Desktop Type	A180	200W	19.5V10.3A	C14	
Desktop Type	A180	230W	19.5V11.8A	C14	
Desktop Type	A180	200W	20V10A	C14	
Desktop Type	A180	240W	20V12A	C14	
Desktop Type	A180	240W	24V10A	C14	
Desktop Type	A180	180W	36V5A	C14	
Desktop Type	A180	240W	48V5A	C14	
Desktop Type	A350	330W	19.5V16.92A	C14	
Desktop Type	A350	280W	20V14A	C14	
Desktop Type	A350	330W	20V16.5A	C14	
Desktop Type	A350	300W	24V12.5A	C14	
Desktop Type	A350	330W	36V9.72A	C14	
Desktop Type	A350	330W	48V7.29A	C14	
Desktop Type	A350	330W	54V6.48A	C14	
Desktop Type	A480	400W	19V21A	C14	
Desktop Type	A480	448W	19.5V23A	C14	
Desktop Type	A480	400W	20V20A	C14	
Desktop Type	A480	460W	20V23A	C14	
Desktop Type	A480	480W	24V24A	C14	
Desktop Type	A480	480W	36V13.3A	C14	
Desktop Type	A480	480W	48V10A	C14	
Desktop Type	A480	480W	54V8.57A	C14	









12-24V DC ADAPTER

MODEL	POWER	INPUT DC
C65-12V3A	36W	
C65-12V5A	60W	
C65-15V4A	60W	
C65-16V4A	65W	
C65-19V3.42A	65W	
C65-20V3.25A	65W	
C65-24V2.7A	65W	
C100-12V7A-8.33A	100W	9-32V DC Adapter
C100-15V6.66A	100W	
C100-16V6.2A	100W	
C100-19V4.74A-5.2A	100W	
C100-24V3.75A-4.16A	100W	
C120-12V10A	120W	
C120-15.6V7.05A	120W	
C120-19V6.32A	120W	
C120-20V6A	120W	
C120-24V5A	120W	
C150-12V12.5A	150W	
C150-19.5V7.7A	150W	
C150-19V7.9A	150W	
C150-20V7.5A	150W	
C150-24V6.25A	150W	







RT100-1-100W

GaN 100W USB-C Power Supply

Input: **100V-240VAC 50/60Hz 1.5A Max**
Output PD3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A (100W)**




Size/ L76.6*W54*H30.1mm

RT100-2-100W

GaN 100W USB-C Power Supply

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max**
C1 Output PD3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A (100W)**
C2 Output PD3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A (100W)**
A1 Output QC2.0/3.0: **5V3A/9V1.5A/12V1.25A (15W)**






C1/C2 Only PD100W MAX | C1+C2: 60W+45W | C1+A1: 90W+15W | C2+A1: 65W+15W | C1+C2+A1: 60W+30W+10W

RT100-3-100W

GaN 100W USB-C Power Supply

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max**
C1 Output PD3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A (100W)**
C2 Output PD3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A (100W)**
A1 Output QC2.0/3.0: **5V3A/9V1.5A/12V1.25A (15W)**





C1/C2 Only PD100W MAX | C1+C2: 60W+45W | C1+A1: 90W+15W | C2+A1: 65W+15W | C1+C2+A1: 60W+30W+10W

RT100-5-100W


GaN 100W USB-C Power Supply

Input: **100-240VAC, 50Hz/60Hz, 1.5A Max**
Output PD3.0 DC: **5V3A/9V3A/12V3A/15V3A/20V5A (100W)**




Size/ L76.6*W54*H30.1mm




Picture	Model	Power	Certificates	Specifications
	QA15 TYPE-C (US)	140W		**GaN 140W USB-C Power Supply** Input: **100V-240VAC 50/60Hz 2A Max** Output PD3.1DC: **5V3A, 9V3A, 12V3A, 15V3A, 20V5A, 28V5A (140W)** 
	QA15 TYPE-C (US1)	140W		
	QA15 TYPE-C (EU)	140W		
	QA15 TYPE-C (UK)	140W		
	QA15 TYPE-C (AU)	140W		
	QA15 TYPE-C (KR+EU)	140W		
	QA15 TYPE-C	140W		




Picture	Model	Power	Certificates	Specifications
	QA15-1-US TYPE-C	140W		**GaN 140W USB-C Power Supply** Input: **100V-240VAC 50/60Hz 2A Max** C1/C2 Output PD3.1DC: **5V3A, 9V3A, 12V3A, 15V3A, 20V5A, 28V5A (140W)**
	QA15-1-US1 TYPE-C	140W		
	QA15-1-EU TYPE-C	140W		
	QA15-1-UK TYPE-C	140W		
	QA15-1-AU TYPE-C	140W		
	QA15-1-TYPE-C	140W		



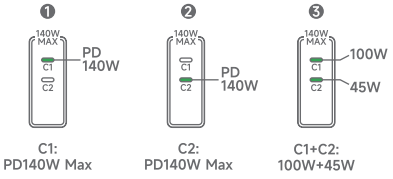



Picture	Model	Power	Certificates	Specifications
	QA15-2-US TYPE-C	140W		**GaN 140W USB-C Power Supply** Input: **100V-240VAC 50/60Hz 2A Max** C1/C2 Output PD3.1DC: **5-15V3A, 20-28V5A (140W)** C1/C2 Output PD3.0 DC: **5V--15V3A, 20V5A (100W)** A1 Output QC2.0/3.0: **5V3A, 9V2A, 12V1.5A (18W)**
	QA15-2-US1 TYPE-C	140W		
	QA15-2-EU TYPE-C	140W		
	QA15-2-UK TYPE-C	140W		
	QA15-2-AU TYPE-C	140W		
	QA15-2-TYPE-C	140W		

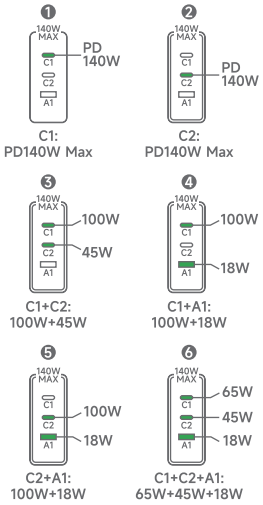

9-32V UNIVERSAL DC CAR CHARGER



PD65W CAR CHARGER



PD100W CAR CHARGER



C150- PD156W-2C2A



UNIVERSAL 100W
LAPTOP CAR CHARGER




PD118W DC
CAR CHARGER



UNIVERSAL 138W
LAPTOP CAR CHARGER

UNIVERSAL
USB TYPE-C PD
POWER ADAPTER

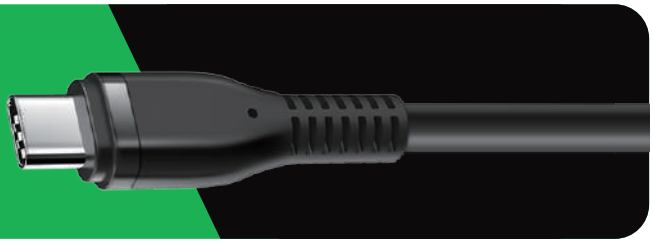

45W

UN



Q45D5-**PD45W**-UN

EU



Q45M1-**PD45W**-EU

US



Q45M1-**PD45W**-US

65W



D40-**PD65W**-DESKTOP

EU



Q65M2-**PD65W**-EU

US



Q65M2-**PD65W**-US

UN



Q65M6-**PD65W**-UN

90W-
100W-
140W-
240W-



A159-**PD90W**



Q100-**PD100W-US**



Q100-**PD100W-EU**



A100-**PD100W**



A100-**GaN-PD140W**



A180-**GaN-PD240W**

Hamburg, Germany

Cathedy GmbH

OFFICE ADDRESS/ **Gutenbergring 54, 22848 Norderstedt, Germany**

+49 40 3085 0991 (Sales) +49 40 3085 0990 (Logistics)

www.hkypower.eu

Shenzhen, China

Shenzhen Huikeyuan Co.,Ltd

FACTORY ADDRESS/ **Potouxia Community, Guanlan Town, Longhua New District, Shenzhen, 518000, CN**

OFFICE ADDRESS/ **Room1503, Tower A, XingHe World, Bantian Street, Longgang District, Shenzhen 518129, CN**

+86 755 8521 9212

www.hkypowersupply.com

